










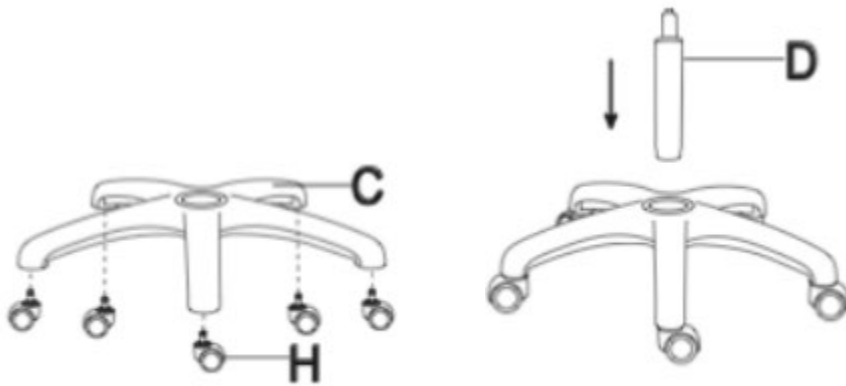


Product Assembly Instructions


Item#: BENDER GAMING DESK CHAIR

Helpers needed to assemble: 2
 Estimate time frame to assemble: **30 minutes**




#	Picture	Description	Quantity
A		Backrest	1
B		Seat	1
C		Base	2
D		Hydraulic - A	1
E		Hydraulic - B	1
F		Armrest	2
G		Tray Lever	1
H		Wheel	5
I		Bolt -	4
J		Bolt -	8
K		Allen Key -	1

- **Step 1:** Identify the base and wheels as these will be the first to be assembled.
- **Step 2:** Does the customer have to turn the wheel on the base for it to click into place?
- **Step 3:** Next, we'll insert the 3-Layer Gas Lift onto the preassembled base.
- **Step 4:** Make sure all 3 components are securely firm on the base.

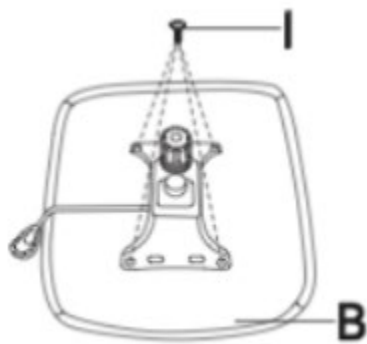

- **Step 5:** Proceed to identify the seat and the tray
- **Step 6:** Using the Allen Key we will bolt down the tray under the seat as seen using (4 Bolt – M6 x 20mm).
- **Step 7:** Make sure to tighten until the tray is firmly attached to the bottom of the seat.

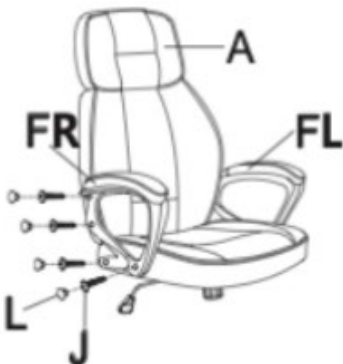

- **Step 8:** Proceed to identify the backrest, preassembled seat, and armrests.
- **Step 9:** Using the Allen Key we will bolt in the armrests to connect the seat and the backrest as seen using (4 Bolt – M6 x 25mm).
- **Step 10:** Make sure to tighten until the armrests are firmly attached to the bottom of the seat and the backrest.



- **Step 11:** Proceed to identify the preassembled base, and preassembled seat and backrest.
- **Step 12:** Place the seat/backrest on the gas lift gently until it clicks.



- **Step 13:** Proceed to test the seat to make sure all components are functioning as they should.
- **Step 13:** Sit and enjoy your new desk chair.