


Item # : LCAKBAWHAG26 / LCAKBAWHPB26 Annikah 26" Barstool
LCAKBAWHAG30 / LCAKBAWHPB30 Annikah 30" Barstool

Thank you for purchasing this quality product. Be sure to check all packing material carefully for small parts, which may come loose inside the carton during shipment . Please identify and count all parts and compare with the HARDWARE LIST below.



Caution : Please read instructions carefully before unpacking assembly parts. Sharp , exposed staples can cause injury , therefore , for your protection , please remove any exposed staples used in packing.

*** Retain the Allen key for regular maintenance. We recommend tightening all screws every three months to ensure continued stability and performance. ***

1. We recommend to assemble this product with the assistance of another person. This will provide a smooth assembly process , and can help eliminate self injuries or damage to the product during assembly.
2. Please do not over tighten screws or bolt until the assembly is completed.
3. Please put all parts on a smooth , flat surface before assembly , and carefully follow the assembly steps to assemble your newly purchased correctly and efficiently.


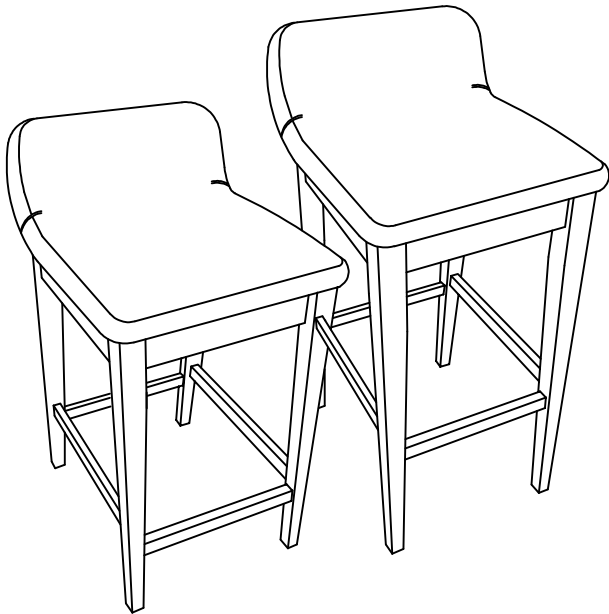


PARTS LIST		
NO.	COMPONENT	QTY.
A	Cushion Seat 	1 pc
B	Box Seat 	1 pc
C	Front Leg - Left (CL) 	1 pc
D	Front Leg - Right (CR) 	1 pc
E	Back Leg - Left (CL) 	1 pc
F	Back Leg - Right (CR) 	1 pc
G	Stretcher - Back & Front 	2 pcs
H	Side Stretcher 	2 pcs

HARDWARE LIST		
NO.	COMPONENT	QTY.
1	JCBC Bolt M6 x 60mm 	8 pcs
2	Spring Washer 	8 pcs
3	Flat Washer 	8 pcs
4	CB Screw M4 x 38mm 	8 pcs
5	CB Screw M4 x 32mm 	4 pcs
6	Allen Wrench 	1 pc

* Phillips screwdriver not included *

Step 1

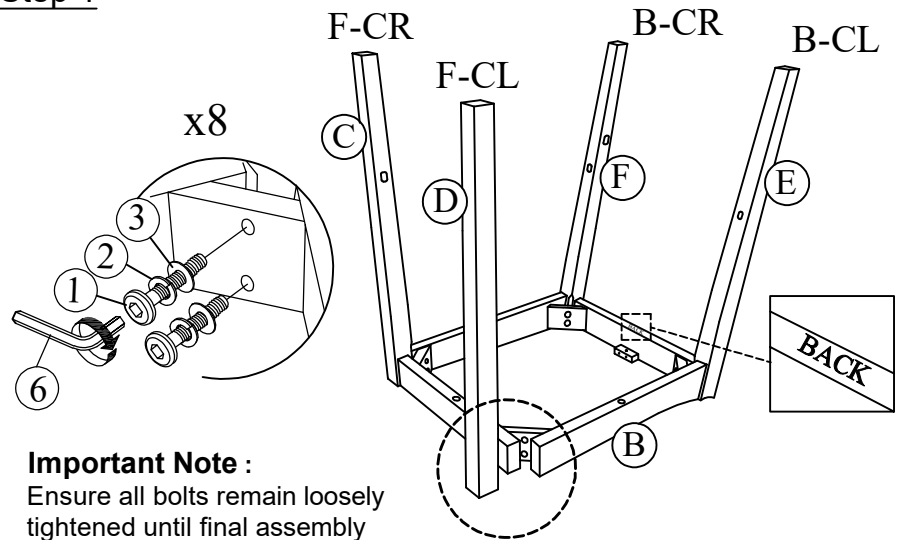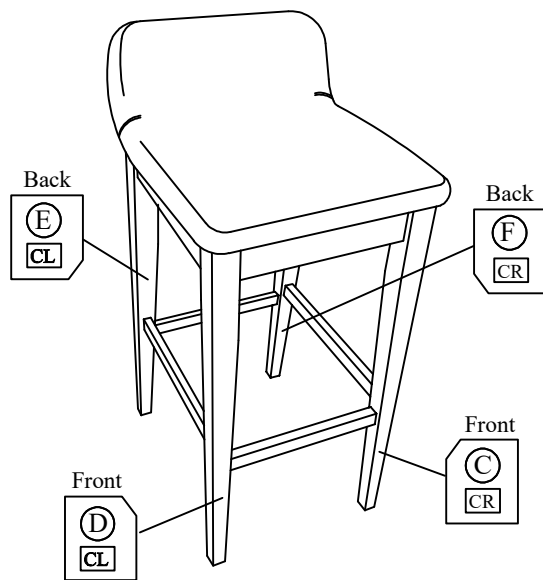


Important Note :

Ensure all bolts remain loosely tightened until final assembly adjustments are made.

Do not fully tighten from this step


- 1) Attach Back Legs (E) and (F) to the back of Box Seat (B), as shown in the diagram. Next attach Front Legs (C) and (D) to the front of Box Seat (B) using 8pcs JCBC Bolts (1) , 8pcs Spring Washers (2) and 8pcs Flat Washers (3) and loosely tighten with Allen Wrench (6).

Step 2

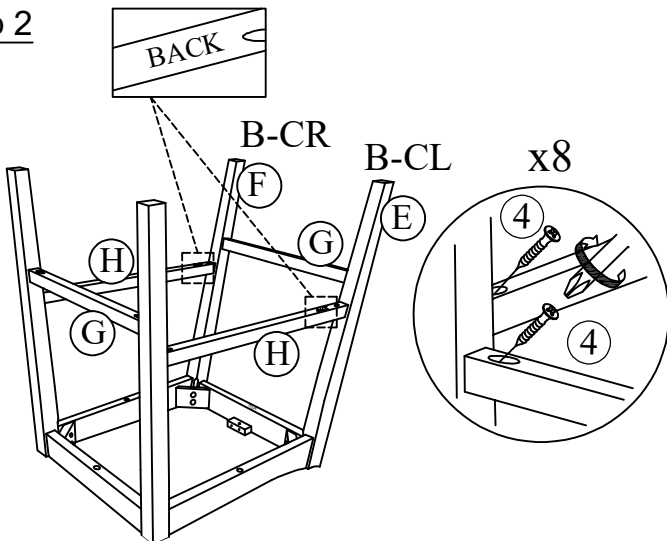

- 1) Attach the Back & Front Stretcher (G) and Side Stretcher (H) to the Leg C , D, E & F. Insert 8pcs screws (4) using Phillips screwdriver (not included) and tighten them securely.

Step 4

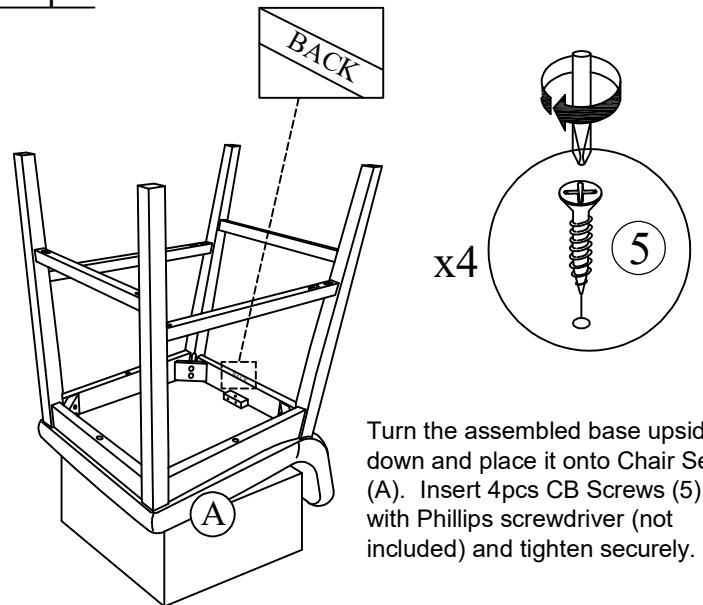


Turn the assembled base upside down and place it onto Chair Seat (A). Insert 4pcs CB Screws (5) with Phillips screwdriver (not included) and tighten securely.

Step 3

Final Adjustment Step :

1. Place the barstool on a flat, level surface.
2. Check that all legs make even contact with the floor. If uneven, adjust the Box Seat (B) by tilting as needed.
3. Once level, securely tighten all bolts.

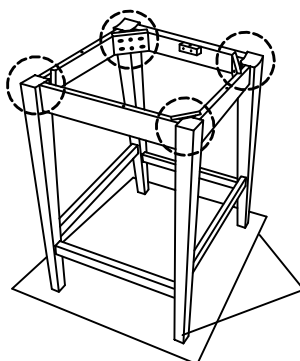

NOTE: ENSURE ALL LEGS ARE LEVEL TO THE FLOOR BEFORE FULLY TIGHTENING ALL BOLTS .

