

Item # : LCCLBAWHLO26 Callah 26" Swivel Barstool


LCCLBAWHLO30 Callah 30" Swivel Barstool

Thank you for purchasing this quality product. Be sure to check all packing material carefully for small parts, which may come loose inside the carton during shipment . Please identify and count all parts and compare with the HARDWARE LIST below.

Caution : Please read instructions carefully before unpacking assembly parts. Sharp , exposed staples can cause injury , therefore , for your protection , please remove any exposed staples used in packing.

*** Retain the Allen key for regular maintenance. We recommend tightening all screws every three months to ensure continued stability and performance. ***


1. We recommend to assemble this product with the assistance of another person. This will provide a smooth assembly process , and can help eliminate self injuries or damage to the product during assembly.
2. Please do not over tighten screws or bolt until the assembly is completed.
3. Please put all parts on a smooth , flat surface before assembly , and carefully follow the assembly steps to assemble your newly purchased correctly and efficiently.

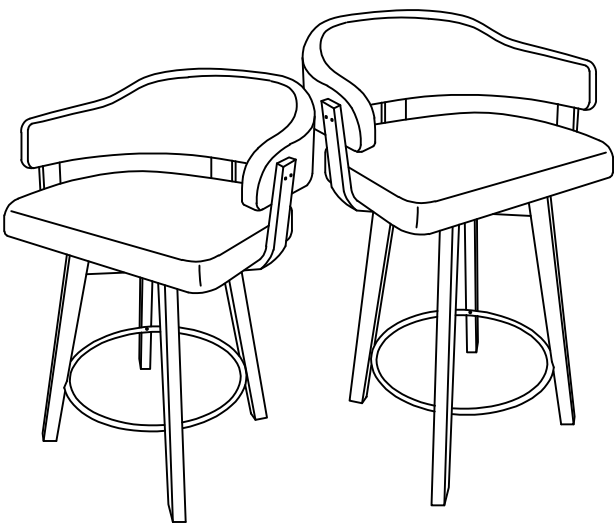

PARTS LIST			
NO.	COMPONENT		QTY.
A	Seat		1 pc
B	Upper Leg		1 pc
C	Lower Leg		1 pc
D	Footrest Ring		1 pc
E	Swivel Plate (Pre assemble)		1 pc


HARDWARE LIST			
NO.	COMPONENT		QTY.
1	JCBC Bolt M6 x 25mm		4 pcs
2	JCBC Bolt M6 x 40mm		8 pcs
3	Spring Washer		8 pcs
4	Flat Washer		8 pcs
5	Allen Wrench		1 pc

Step 1

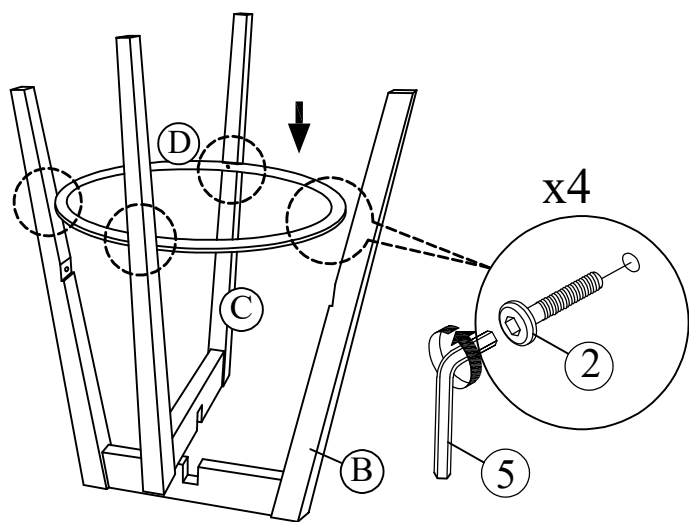


Insert Lower Leg (C) across Upper Leg (B). Attach Footrest Ring (D) to the legs using 4pcs JCBC bolts (2) . Tighten all bolts securely using the Allen Wrench (5).

Step 2

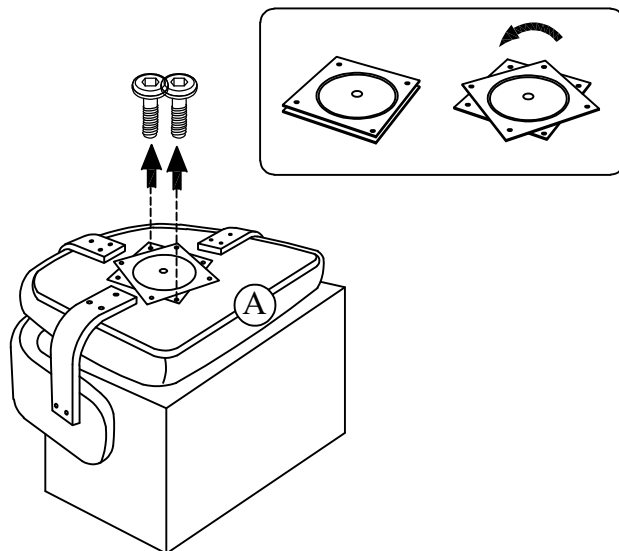


Rotate the swivel plate to 45 degree as shown in diagram. Remove and discard the bolt from Swivel Plate (E) .

Step 3

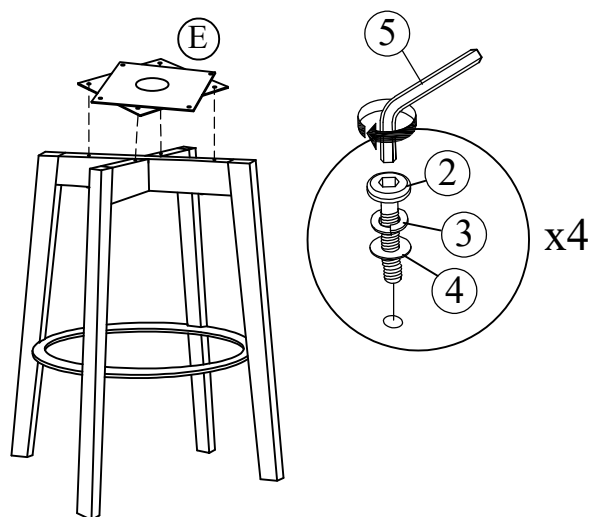

Attach Swivel Plate (E) to leg using 4pcs JCBC Bolts (2) , 4pcs Spring Washers (3) , 4pcs Flat Washers (4) with Allen Wrench (5) and tighten all the bolts securely.

Step 4

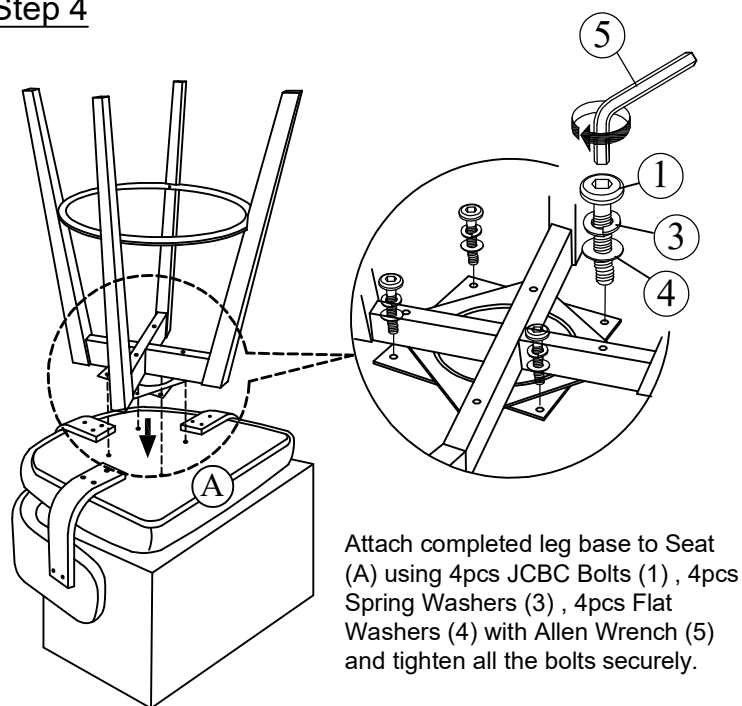

Attach completed leg base to Seat (A) using 4pcs JCBC Bolts (1) , 4pcs Spring Washers (3) , 4pcs Flat Washers (4) with Allen Wrench (5) and tighten all the bolts securely.

