


Item # : LCJEBADCWH26 / LCJEBATTAG26 Jane 26" Backless Barstool LCJEBADCWH30 / LCJEBATTAG30 Jane 30" Backless Barstool


Thank you for purchasing this quality product. Be sure to check all packing material carefully for small parts, which may come loose inside the carton during shipment . Please identify and count all parts and compare with the HARDWARE LIST below.

Caution : Please read instructions carefully before unpacking assembly parts. Sharp , exposed staples can cause injury , therefore , for your protection , please remove any exposed staples used in packing.

*** Retain the Allen key for regular maintenance. We recommend tightening all screws every three months to ensure continued stability and performance. ***

1. We recommend to assemble this product with the assistance of another person. This will provide a smooth assembly process , and can help eliminate self injuries or damage to the product during assembly.
2. Please do not over tighten screws or bolt until the assembly is completed.
3. Please put all parts on a smooth , flat surface before assembly , and carefully follow the assembly steps to assemble your newly purchased correctly and efficiently.

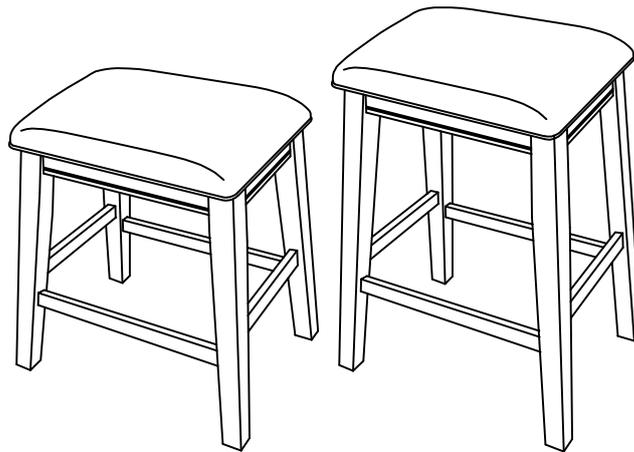


PARTS LIST		
NO.	COMPONENT	QTY.
A	Seat 	1 pc
B	Leg - Left (CL) 	2 pcs
C	Leg - Right (CR) 	2 pcs
D	Long Stretcher 	2 pcs
E	Short Stretcher 	2 pcs

HARDWARE LIST		
NO.	COMPONENT	QTY.
1	JCBC Bolt M6 x 60mm 	8 pcs
2	Spring Washer 	8 pcs
3	Flat Washer 	8 pcs
4	CB Screw M4 x 38mm 	8 pcs
5	Allen Wrench 	1 pc

* Phillips screwdriver not included *

Step 1

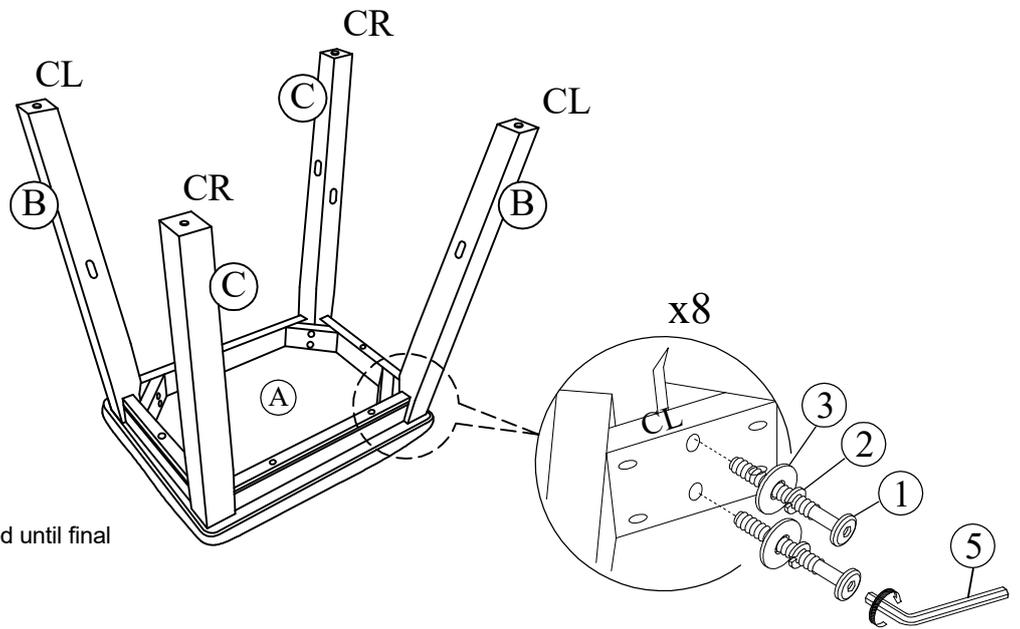


Important Note :

Ensure all bolts remain loosely tightened until final assembly adjustments are made.

Do not fully tighten from this step

- 1) Attach Leg Left B (CL) & Leg Right C (CR) to Seat (A) using 8pcs JCBC Bolts (1) , 8pcs Spring Washers (2) and 8pcs Flat Washers (3) and loosely tighten with Allen Wrench (5).

Step 2

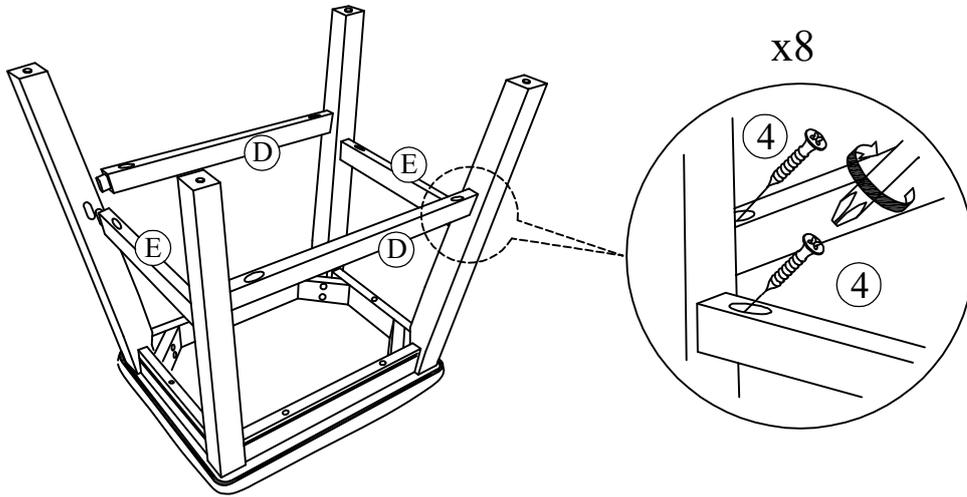


- 1) Attach the Long Stretcher (D) & Short Stretcher (E) to the Leg B & C . Insert 8pcs screws (4) using Phillips screwdriver (not included) and tighten them securely.

Step 3

Final Adjustment Step :

1. Place the barstool on a flat, level surface.
2. Check that all legs make even contact with the floor. If uneven, adjust the Seat (A) by tilting as needed.
3. Once level, securely tighten all bolts .

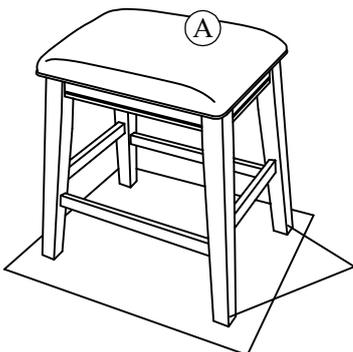

NOTE: ENSURE ALL LEGS ARE LEVEL TO THE FLOOR BEFORE FULLY TIGHTENING ALL BOLTS .

