

Product Assembly Instructions


Item#: MARCEL ADJUSTABLE BARSTOOL

Helpers needed to assemble: 2

Estimate time frame to assemble: 10 minutes

Thank you for purchasing this quality product. Be sure to check all packing material carefully for small parts, which may come loose inside the carton during shipment. Please identify and count all parts and compare with the HARDWARE LIST below.


Caution: Please read instructions carefully before unpacking assembly parts. Sharp, exposed staples can cause injury, therefore, for your protection, please remove any exposed staples used in packing.

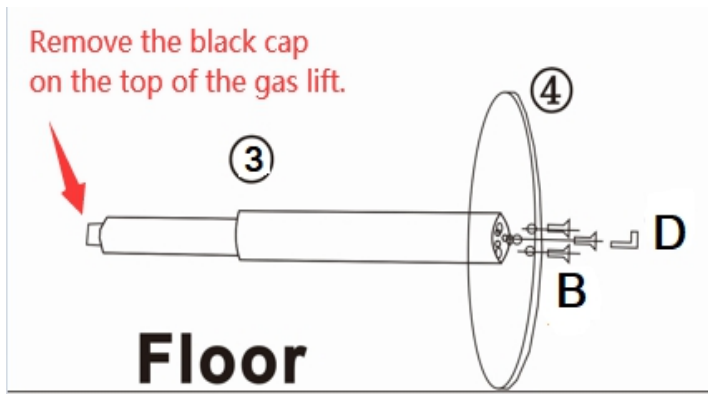

Step 1: Align the base(4) onto the bottom of hydraulic (3).
Use allen key "D" to lock the 3 screws "B".

Step 2: Remove the black cap on the top of the gas lift.

Step 3: Align the column(2) onto the bottom of seat (1).
Use allen key "C" to lock the 4 screws "A".

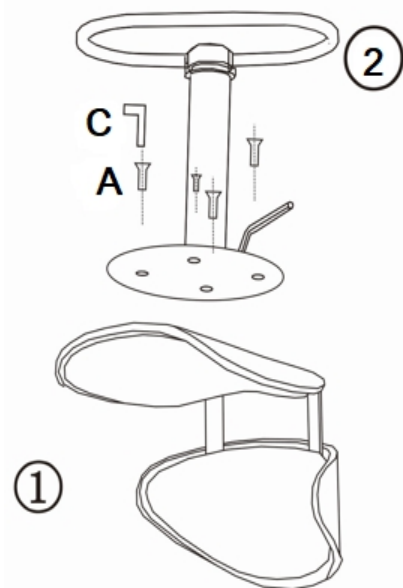

#	Picture	Description	Quantity
1		Seat	1
2		Mid-column	1
3		Hydraulic	1
4		Base	1
A		Bolts(M6x15)	4
B		Bolts(M8x30)	3
C		Allen Key(φ 4)	1
D		Allen Key(φ 5)	1



Step 4: Place the assembled seat onto the base, and make sure it is placed vertically.

Step 5: The height can be adjusted by holding the handle underneath the seat.

Step 6: Sit and enjoy your new barstool.

*** Keep the Allen Key and Tighten all screws each 3 months for safety concern!**